


Product APPLICATION Guide

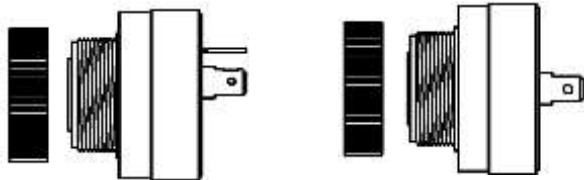

**Screw Neck Panel Mount
Flat Blade Terminals**

30 mm Panel Mount- Continuous Tone

Non-RoHS Part No.	RoHS Part No.	cUL	Min Sound Level dBa (2 ft)	Freq. (Hz)	Operating Voltage	Max Current (mA)	Size Dia x Len (in)	Termination Type
Loud Sound Level- Continuous Tone								
N/A	SC616N-BTR	■	80 - 95	2900	6-16 Vdc	6 - 22	1.69 x 0.81	Flat Blades
N/A	SC628N-BTR	■	80 - 90	2900	6-28 Vdc	6 - 23	1.69 x 0.81	Flat Blades
N/A	SC628AN-BTR	■	80 - 95	2900	6-28 Vac/dc	4 - 30	1.69 x 0.81	Flat Blades
Medium Sound Level- Continuous Tone								
N/A	SC628-BTR	■	68 - 80	2900	6-28 Vdc	3 - 18	1.69 x 0.81	Flat Blades
N/A	SC628D-BTR	■	60 - 75	1900	6-28 Vdc	6 - 23	1.69 x 0.81	Flat Blades
N/A	SC628H-BTR	■	68 - 80	4500	6-28 Vdc	6 - 23	1.69 x 0.81	Flat Blades

30 mm Panel Mount- Fast & Slow Pulse Tone

Loud Sound Level- Fast Pulse Tone (2 - 10 pulses per second)								
N/A	SC616NP-BTR	■	80 - 95	2900	6-16 Vdc	6 - 22	1.69 x 0.81	Flat Blades
Loud Sound Level- Slow Pulse Tone (0.5 - 2 pps)								
N/A	SC616NJ-BTR	■	80 - 95	2900	6-16 Vdc	4 - 16	1.69 x 0.81	Flat Blades
Medium Sound Level- Fast Pulse Tone (2 - 10 pps)								
SC616P-1	SC616P-1R		68 - 78	2900	6-16 Vdc	2 - 9	1.69 x 0.81	Flat Blades- 90°
N/A	SC628P-BTR	■	68 - 80	2900	6-28 Vdc	6 - 26	1.69 x 0.81	Flat Blades
Medium Sound Level- Slow Pulse Tone (0.5 - 2 pps)								
SC616J-1	SC616J-1R		68 - 78	2900	6-16 Vdc	2 - 9	1.69 x 0.81	Flat Blades- 90°

30 mm Panel Mount- Chime Tone

Medium Sound Level- Chime Tone (0.3 - 2 pps)								
N/A	SC616CP-BTR	■	68 - 78	2900	6-16 Vdc	6 - 23	1.69 x 1.38	Flat Blades

Note: Order Accessory P/N: ACC03 for NEMA 4X Applications

Call 317-612-1000 or Visit www.mallory-sonalert.com for More Details