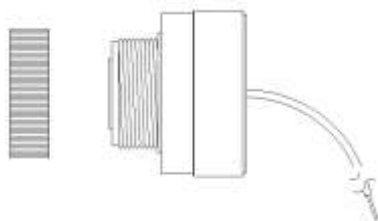


Product APPLICATION Guide

**Screw Neck Panel Mount**

30 mm Panel Mount w/Wires- Continuous Tone

Non-RoHS Part No.	RoHS Part No.	cUL	Min Sound Level dBa (2 ft)	Freq. (Hz)	Operating Voltage	Max Current (mA)	Size Dia x Len (in)	Termination Type
Loud Sound Level- Continuous Tone								
SC161NL	SC616NLR	■	80 - 95	2900	6-16 Vdc	6 - 22	1.69 x 0.81	Wires
SC628NL	SC628NLR	■	80 - 90	2900	6-28 Vdc	6 - 23	1.69 x 0.81	Wires
Medium Sound Level- Continuous Tone								
SC628L	SC628LR	■	68 - 80	2900	6-28 Vdc	6 - 23	1.69 x 0.81	Wires

Call 317-612-1000 or Visit www.mallory-sonalert.com for More Details