


## 22mm Alarms with Wires

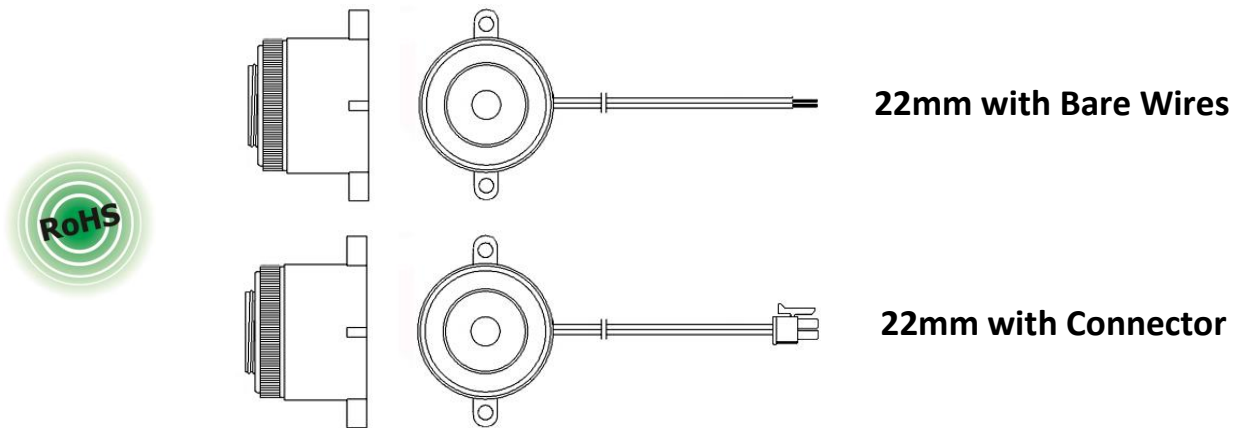

## 22mm with Wires- Continuous Tone

RoHS Part No.	Sound Level @ 12Vdc @ 1 ft (30 cm)	Freq. (Hz)	Operating Voltage	Current @ 12 Vdc (mA)	Size Dia x Len (mm)	Termination Type
PK-20A35EWQ	95	3500	3-24 Vdc	10	28 x 25	2 Bare Wires
PK-20A35EWQ-MX	95	3500	3-24 Vdc	10	28 x 25	Connector
PK-20A35EWQ-24V	95	3500	12-28 Vdc	20	28 x 25	2 Bare Wires
PK-20A35EWQ-24V-MX	95	3500	12-28 Vdc	20	28 x 25	Connector

### Notes:

- Flange Holes are 3 mm in Diameter, and the holes are 33.5 mm c/c.
- Wire length is 150 mm.
- For “-MX” models, the connector is Molex Micro-Fit 3.0 P/N 43025-0200. Use mating connector P/N 43020-0201.

## 22mm with Wires- Fast & Slow Pulse Tone

RoHS Part No.	Sound Level @ 12Vdc @ 1 ft (30 cm)	Freq. (Hz)	Operating Voltage	Current @ 12 Vdc (mA)	Size Dia x Len (mm)	Termination Type
<b>Fast Pulse Tone (3 pps)</b>						
PF-20A35EWQ	95	3500	3-24 Vdc	10	28 x 25	2 Bare Wires
PF-20A35EWQ-MX	95	3500	3-24 Vdc	10	28 x 25	Connector
<b>Slow Pulse Tone (1.2 pps)</b>						
PL-20A35EWQ	95	3500	3-24 Vdc	10	28 x 25	2 Bare Wires
PL-20A35EWQ-MX	95	3500	3-24 Vdc	10	28 x 25	Connector

### Notes:

- Flange Holes are 3 mm in Diameter, and the holes are 33.5 mm c/c.
- Wire length is 150 mm.
- For “-MX” models, the connector is Molex Micro-Fit 3.0 P/N 43025-0200. Use mating connector P/N 43020-0201.

## 22mm with Wires- Dual Tone

RoHS Part No.	Sound Level @ 12Vdc @ 1 ft (30 cm)	Freq. (Hz)	Operating Voltage	Current @ 12 Vdc (mA)	Size Dia x Len (mm)	Termination Type
<b>Continuous or Fast Pulse Tone (3 pps)</b>						
PFD-20A35EWQ	95	3500	3-24 Vdc	10	28 x 25	3 Bare Wires
PFD-20A35EWQ-MX	95	3500	3-24 Vdc	10	28 x 25	Connector
<b>Continuous or Slow Pulse Tone (1.2 pps)</b>						
PLD-20A35EWQ	95	3500	3-24 Vdc	10	28 x 25	3 Bare Wires
PLD-20A35EWQ-MX	95	3500	3-24 Vdc	10	28 x 25	Connector

### Notes:

- Flange Holes are 3 mm in Diameter, and the holes are 33.5 mm c/c.
- Wire length is 150 mm.
- For “-MX” models, the connector is Molex Micro-Fit 3.0 P/N 43025-0400. Use mating connector P/N 43020-0401.

Call 317-612-1000 or Visit [www.mallory-sonalert.com](http://www.mallory-sonalert.com) for More Details